

# How to remove a damaged tile

---


## Step One

The first step is to remove the grout on all 4 sides of the tile. This procedure can be carried using a sharp knife but being careful not to damage the other remaining tiles.



## Step Two

When removal of the grout is finished and again using a sharp knife, cut the interlocking tabs on **3 sides only** of the tile to be replaced. (see Pic 3 ) Once the tabs are cut lift the edge of the tile and unclick the tabs that are remaining

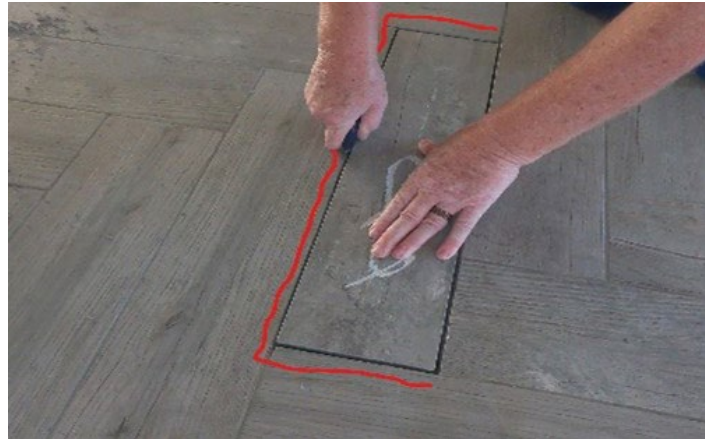

---

## Step Three


Clean all the edges of existing tiles before installing new tile



---

## Step Four

You are now ready to install the new tile. Cut the plastic tabs off 3 sides of the new tile to be installed, snips are ideal to use for this procedure. Flip the tile over and apply some construction adhesive on the back.

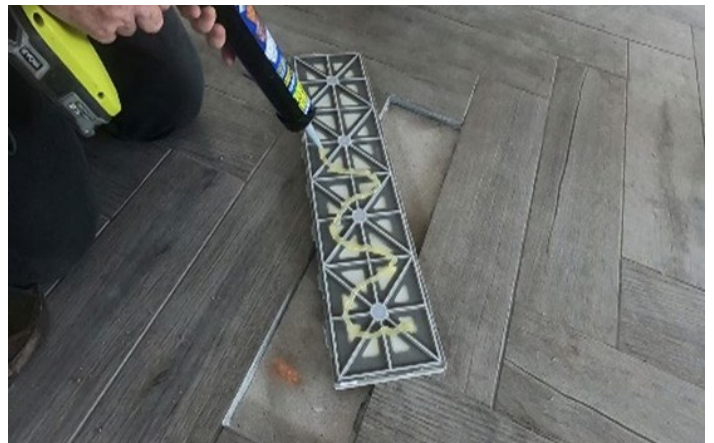

---

## Step Five


Insert the tile by clicking the edge with tabs on, into the existing tile, using a rubber mallet tap it home securely.



---

## Step Six

Put a weight on the replacement tile until construction adhesive dries, grout as normal and wait until grout dries before walking on

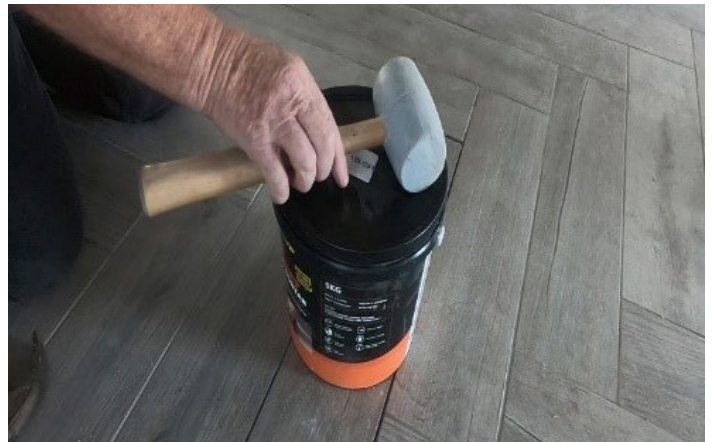

---

## Finished

